

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >
Title	<b>Clarification of AAS Private Map with H-ARQ Support</b>
Date Submitted	<b>2005-01-20</b>
Source(s)	Inseok Hwang ,Jaehee Cho, Seungjoo Maeng, Jaeho Jeon, Soonyoung Yoon, <b>Samsung Electronics Co. Ltd.</b> <a href="mailto:is91.hwang@samsung.com">is91.hwang@samsung.com</a>
Re:	Recirculation of IEEE 802.16maint-04/10
Abstract	Clarification of AAS private map with H-ARQ support is proposed.
Purpose	Adoption of the suggested changes
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard."  Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:r.b.marks@ieee.org">mailto:r.b.marks@ieee.org</a> > as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.

## Introduction

The reduced AAS private map concatenates MAP and DL data burst and apply the coding and modulation to the concatenated burst, which is designed to exploit beam-forming gain and signaling efficiency of bandwidth allocation. However, clarification and modification of reduced AAS private DL map is needed for reliable H-ARQ operation and MAP signaling. The H-ARQ operation allows the retransmission of coded symbols, which imply that each transmission cannot be decoded correctly. Consequently, the reduced AAS\_private\_map containing H-ARQ signaling information should be encoded separately from DL traffic burst itself to exploit the advantage of H-ARQ operation.

## Problem Definition

The reduced AAS private map concatenates MAP and DL data burst and apply the coding and modulation to the concatenated burst, which is designed to exploit beam-forming gain and signaling efficiency of bandwidth allocation. However, clarification and modification of reduced AAS private DL map is needed for reliable H-ARQ operation and MAP signaling. The H-ARQ operation allows the retransmission of coded symbols, which imply that each transmission cannot be decoded correctly. Consequently, the reduced AAS\_private\_map containing H-ARQ signaling information should be encoded separately from DL traffic burst itself to exploit the advantage of H-ARQ operation.

Fig. 1 illustrates the reduced AAS Private MAP operation when reduced AAS Private MAP points the allocation region for next frame. In the figure, dashed box denotes the absolute allocation region.

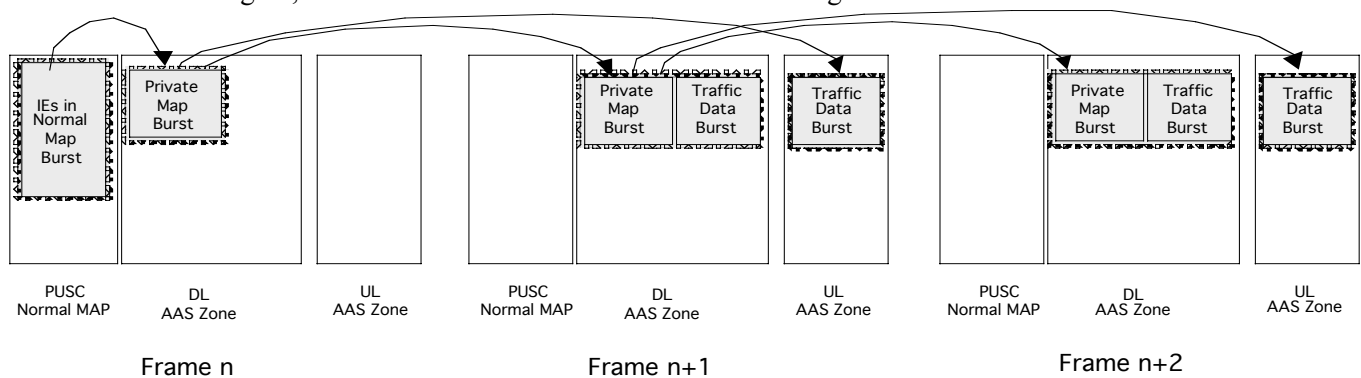


Fig. 1. Reduced AAS Private MAP Operation

## Proposed Solution

To enable separate modulation and coding, the following fields are added in Reduced\_AAS\_Private\_DL\_MAP message. Note that when 'Separate MCS Enabled', DL data burst a reduced\_AAS\_Private\_MAP including all AAS configuration change information, bandwidth allocation, H-ARQ signaling information are encoded separately.

- 'Separate MCS Enabled' to indicate separate coding for reduced AAS Private Map and DL data burst
- 'Slot Duration' to specify number of slots for transmitting reduced AAS\_Private\_MAP
- 'DIUC and Repetition Coding Indication' for reduced AAS\_Private\_MAP

Since the reduced AAS\_Private\_DL\_MAP specifies the two-dimensional region for reduced AAS\_Private\_MAP and DL data burst, the data burst are transmitted through the remaining slots after assigning slots for reduced AAS\_Private\_MAP.

Also, H-ARQ related information field in reduced AAS\_Private\_DL/UL\_MAP is clarified to support both chase-combining and incremental redundancy type.

## Suggested text changes to 16.d standard

[Modify the table ZZZ in 8.4.5.8.1 “Reduced AAS Private DL-MAP”]

Table ZZZ- Reduced\_AAS\_Private\_DL-MAP message format

Syntax	Size (bits)	Notes
Reduced_AAS_Private_DL-MAP(){		
Compressed map indicator	2	0b 11 for compressed format
<i>Reserved</i>	1	Shall be set to zero
UL-MAP appended	1	
Compressed Map Type	2	0b 11 for reduced private map
Multiple IE	1	0: Single IE Mode 1: Multiple IE Mode
If (Multiple IE) {		
NUM IEs	8	Set 1 for single IE mode
}		
For (ii =1: NUM IE) {		
CID Included	1	The CID shall be included in the first compressed private MAP if it was pointed by a DL-MAP IE with INC_CID == 0 or by a DL-MAP IE with a multicast CID.
DCD Count Included	1	
PHY modification Included	1	Preamble modifier
H-ARQ Enabled	1	
<u>Separate MCS Enabled</u>	<u>1</u>	<u>Separate coding applied for reduced AAS Private MAP and DL data burst</u>
If (Separate MCS Enabled) {		
<u>Duration</u>	<u>10</u>	<u>Slot duration for reduced AAS Private Map</u>
<u>DIUC</u>	<u>4</u>	<u>Modulation &amp; Coding Level</u>
<u>Repetition Coding Indication</u>	<u>2</u>	<u>00: No repetition 01: Repetition of 2 10: Repetition of 4 11: Repetition of 6</u>
}		
If (CID included) {		
CID	16	
<del>CQICH_Control_IE()</del>	<del>4/16</del>	
<u>Allocation Index</u>	<u>6 bits</u>	<u>CQICH Sub-channel index within Fast-feedback region marked with UIUC = 0</u>
<u>Report Period</u>	<u>2 bits</u>	<u>Reporting period indicator (in frames)</u>
<u>Frame offset</u>	<u>3 bits</u>	<u>Start frame offset for initial reporting</u>
<u>Report Duration</u>	<u>4 bits</u>	<u>Reporting duration indicator</u>
<u>Reserved</u>	<u>1</u>	
}		
If (H-ARQ Enabled) {		
<del>N<sub>SCH</sub></del>	<del>4</del>	
ACK Allocation Index	6	ACK channel index within HARQ ACK region
<del>H-ARQ_Control_IE()</del>	<del>4/8</del>	
<u>ACID</u>	<u>4 bits</u>	<u>H-ARQ channel ID</u>
<u>AI_SN</u>	<u>1 bit</u>	<u>H-ARQ Seq. Number Indicator</u>
If (IR Type) {		Incremental Redundancy

<u>N<sub>SCH</sub></u>	<u>4 bits</u>	Indicator for IR coding/modulation
<u>SPID</u>	<u>2 bits</u>	H-ARQ Sub-packet ID
<u>Reserved</u>	<u>2</u>	
}		
<u>Reserved</u>	<u>1</u>	
}		
If (DCD Count Included) {		
DCD Count	8	
}		
If (PHY modification Included) {		
Preamble Select	1	0: Freq. shift preamble 1: Time shift preamble
Preamble Shift Index	4	Updated preamble index to be used starting with the frame specified by the Frame Offset
Reserved	3	
}		
DIUC/N <sub>EP</sub>	4	DIUC for non-H-ARQ/Chase Combining; N <sub>EP</sub> for Incremental Redundancy H-ARQ
Frame Offset	3	Map relevance "0" indicates an allocation in the subsequent frame
If (FUSC or O-FUSC) {		
Zone symbol offset	8	The offset of the OFDMA symbol in which the zone containing the burst starts, measured in OFDMA symbols from beginning of the downlink frame referred to by the Frame Offset.
}		
OFDMA symbol offset	8	Starting symbol offset referenced to DL preamble of the downlink frame specified by the Frame Offset
Subchannel offset	8	
No of OFDMA symbols	7	
No of subchannels	7	
Repetition Coding Indication	2	00: No repetition 01: Repetition of 2 10: Repetition of 4 11: Repetition of 6
Reserved	1	
CRC-32	32	
}		End of NUM IE loop
Padding	Variable	Padding depends on H-ARQ operation IEs and appended AAS_UL_Private_Map
}		

Since the reduced AAS\_Private\_DL\_MAP specifies the two-dimensional region for reduced AAS\_Private\_MAP and DL data burst, the data burst are transmitted through the remaining slots after assigning slots for reduced AAS\_Private\_MAP when Separate MCS Enabled.

[Modify the table YYY1 in 8.4.5.8.2 "Reduced AAS Private UL-MAP"]

**Table YYY1- Reduced\_AAS\_Private\_UL-MAP message format**

Syntax	Size (bits)	Notes
--------	-------------	-------

Reduced_AAS_Private_UL-MAP(){		
For (ii =1: NUM IE) {		
AAS zone configuration Included	1	AAS configuration should be included in the first UL MAP of a private map chain to define the UL AAS Zone
AAS zone position Included	1	AAS zone position should be included in the first UL MAP of a private map chain to define/change the UL AAS Zone.
UCD Count Included	1	UCD Count should be included in the first allocation of a private map chain.
PHY modification Included	1	Preamble modifier (shift index)
Power Control Included	1	Power control value (Up/Down amount)
If (AAS Zone Config Included) {		
Permutation	2	0b 00: PUSC 0b 01: FUSC 0b 10: AMC 0b 11: Reserved
UL PermBase	7	
Preamble Indication	2	0b 00: 0 symbol 0b 01: 1 symbol 0b 10: 2 symbols 0b 11: 3 symbols
Padding	5	
}		
If (AAS Zone Position Included) {		
Zone Symbol Offset	8	
Zone Length	8	
}		
If (UCD Count Included) {		
UCD Count	8	
}		
If (PHY modification Included) {		
Preamble Select	1	0: Freq. shift preamble 1: Time shift preamble
Preamble Shift Index	4	Updated preamble index to be used starting with the frame specified by the Frame Offset
Reserved	3	
}		
If (Power Control Included) {		
Power Control	8	Signed integer in 0.25 dB Unit
}		
If (H-ARQ Enabled) {		
<del>H-ARQ Control IE()</del>	<del>4/8</del>	
<u>ACID</u>	<u>4 bits</u>	<u>H-ARQ channel ID</u>
<u>AI_SN</u>	<u>1 bit</u>	<u>H-ARQ Seq. Number Indicator</u>
<u>Reserved</u>	<u>3</u>	
If (IR Type) {		<u>Incremental Redundancy</u>
<u>N<sub>SCH</sub></u>	<u>4 bits</u>	<u>Indicator for IR coding/modulation</u>
<u>SPID</u>	<u>2 bits</u>	<u>H-ARQ Sub-packet ID</u>
<u>Reserved</u>	<u>2</u>	
}		
}		
UIUC/N <sub>EP</sub>	4	<u>UIUC for non-H-ARQ/Chase Combining;</u> <u>N<sub>EP</sub> for Incremental Redundancy H-ARQ</u>

Frame Offset	3	Map relevance "0" indicates an allocation in the subsequent frame
Slot offset	12	Starting slot offset referenced to first slot of the UL AAS zone
Slot Duration	10	
Repetition Coding Indication	2	00: No repetition 01: Repetition of 2 10: Repetition of 4 11: Repetition of 6
Padding	Variable	
}		
}		