

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Correction for UL-MAP processing time mismatch	
Date Submitted	2004-11-01	
Source(s)	Intel.	
	Yuval Lomnitz	Yuval.Lomnitz@intel.com
	Yigal Eliaspur	Yigal.Eliaspur@intel.com
	Noam Kogan	
	Dov Andelman	
Re:	IEEE P802.16REVd/D5-2004	
Abstract	Correct UL MAP processing time definition	
Purpose	Adopt changes to definition of UL-MAP processing time (Tproc) in OFDMA	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Correction for UL-MAP processing time mismatch

*Yuval Lomnitz, Yigal Eliaspur
Noam Kogan, Dov Andelman*

1. Motivation

For OFDMA PHY there is a contradiction between the definition that UL-MAP relevance is next frame (defined in 6.3.7.5.4) and the UL-MAP processing time of 10 OFDMA symbols. Since the duration of OFDMA symbol varies depending on channel bandwidth, in some scenarios the processing time is larger than a frame (which prohibits operation with given frame duration), and in some cases is too small (over-requirement for the SS).

We propose that the contradictory definition be changed, and UL-MAP processing time will be defined as proportion of frame duration.

2. Details

UL-MAP processing time (T_{proc}) is defined in 10.1 (Global values) p.642, line 10 as 10 OFDMA symbols, and minimum value for allocation start time is also defined as 10 OFDMA symbols (10.3.4.1). Since these values are defined in OFDMA symbols, whose duration depends on channel bandwidth, their relation with frame duration changes (depending on bandwidth).

For example, for 5Mhz bandwidth, 10 OFDMA symbols are 4ms, which precludes operation with 2ms or 2.5ms frames while keeping the UL-MAP relevance to next frame. On the other hand, for 20Mhz bandwidth and 5ms frame, the processing time requirement is 1ms, which is overly strict, since in most cases, since the UL-MAP is relevant to next frame, the time between the end of UL-MAP and start of corresponding UL-subframe, is larger than frame duration (in TDD). The BS can only take advantage of this short processing time in extreme and unrealistic cases of dynamic UL-DL ratio and very long UL-MAP.

In order to prevent contradictions we suggest to define UL-MAP processing time as proportion of frame duration. The logic behind this definition is that most of the work on UL-MAP is proportional to the potential amount of data to transmit, which is proportional to frame duration. This imposes the minimum restriction on the SS required for system operation.

The proposed definition is:

$T_{proc} = \text{frame duration}$

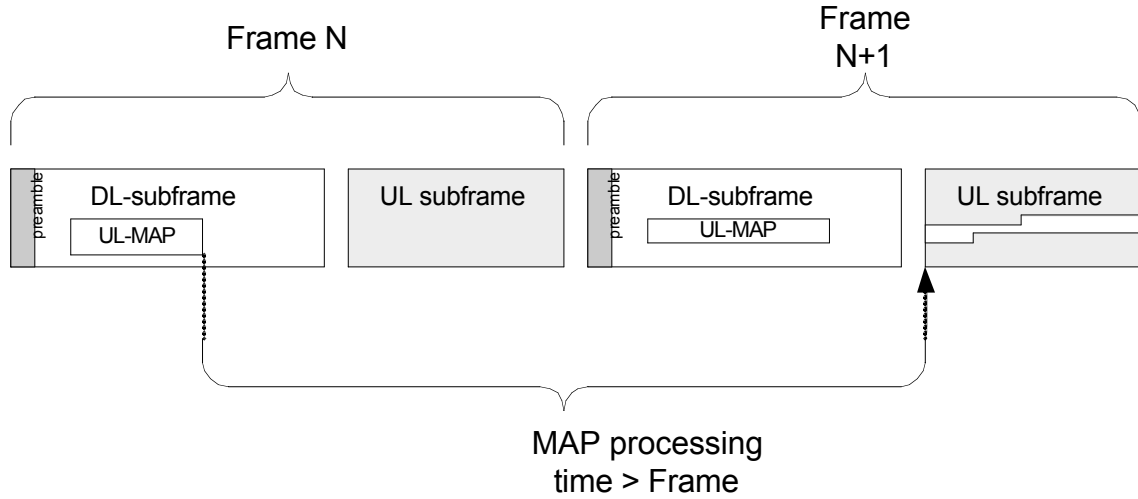


Figure 1 – UL-MAP processing example: TDD

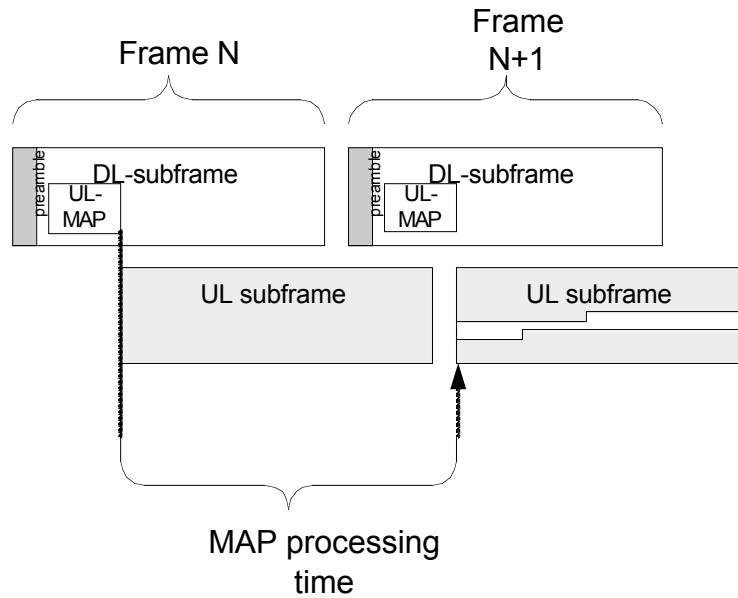


Figure 2 – UL-MAP processing example: FDD

3. Changes summary

10.1 Global values

[Make the following change in table 340 (p.642, line 10):]

BS, SS	T _{proc}	Time provided between arrival of the last bit of a UL-MAP at an SS and effectiveness of that map	SC: 200 μs OFDM: 1 ms OFDMA: 10 OFDMA Symbols $T_{proc} = T_f$.
--------	-------------------	--	--

10.3.4.1 Uplink Allocation Start Time

[Make the following change]

Unit of Allocation Start Time shall be PSs from the start of the downlink frame in which the UL-MAP message occurred. The minimum value specified for this parameter shall correspond to **the value of T_{proc} specified in Table 340-10-OFDMA symbols.**